



# **Self-Educting**

Self-Educting master stream nozzles turn any monitor into a foam station without the use of additional equipment and have been part of Elkhart's fire suppression arsenal for over 20 years. Elkhart is proud to have been one of the pioneers in the development of the Hydro-Foam® line of self-educting nozzles.

Some of the features of self-educting nozzles include:

- Designed specifically for use with Class A and B foam, including AFFF and fluoroprotein
- Field-adjustable foam proportioning with pre-set options
- Combination nozzle include straight stream, narrow fog (30°), or wide fog (90°)

Since introduction, Elkhart has expanded the self-educting Master Stream nozzle line to include:

- Easy to use, original Hydro-Foam® nozzles of brass or Elk-O-Lite® construction
- X-Stream® nozzles that combine self-educting ability with the convenience of automatic metering



#### **SELF-EDUCTING**

|                       | NOZZLE FAMILY   |  |  |  |  |  |  |  |  |  |
|-----------------------|---|--|--|--|--|--|--|--|--|--|
|                       | X-Stream <sup>®</sup>   | Hydro-Foam®  |  |  |  |  |  |  |  |  |
| Flow Type             | Automatic   | Fixed  |  |  |  |  |  |  |  |  |
| Description           | High flow automatic nozzle  | Original self-educting nozzle  |  |  |  |  |  |  |  |  |
| Benefit               | Optimizes use of concentrate<br>and produces effective foam<br>under a variety of conditions                      | Simple to use and flows well.<br>Elk-O-Lite® version is lightweight and<br>excellent for portable monitor use. |  |  |  |  |  |  |  |  |
| Foam<br>Proportioning | Dual range, field selectable<br>(SM-1000-HF and SM-1000E-HF)<br>or fixed metering (SM-2000-HF<br>and SM-2000E-HF) | Fixed metering via orifice insert  |  |  |  |  |  |  |  |  |

## **OPTIONS**

- SM-1000E-HF features an 8' pick-up tube
- SM-2000E-HF features an 8' pick-up tube

#### **THREADS**

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads.

|           | FAMILY / FLOW RATE                         |                                 |            |            |            |              | FOAM<br>PROPORTIONING |    |    |            |         |          | Certifications | MATERIAL /<br>FINISH |           |     |           |             |                       |            |                       |    |
|-----------|--|---------------------------------|------------|------------|------------|--------------|-----------------------|----|----|------------|---------|----------|----------------|----------------------|-----------|-----|-----------|-------------|-----------------------|------------|-----------------------|----|
| Base Size | X-STREAM®/ HYDRO-<br>AUTOMATIC FOAM®/FIXED |                                 |            |            |            | CONFIGURABLE |                       |    |    | SELECTABLE |         |          | Certific       | BRASS                |           |     |           |             |                       |            |                       |    |
|           | GPM (LPM)                                  |                                 |            |            |            |              |                       |    |    |            |         |          |                |                      |           |     |           |             |                       |            |                       |    |
|           |  | 750-<br>2000<br>(2839-<br>7571) | 350 (1325) | 500 (1893) | 750 (2839) | 1000 (3785)  | ₩7%                   | 1% | 3% |            | 1% / 3% |          | ric            | UL Listed            | s (Satin) | me  | Composite | Elk-O-Lite® | Effective Reach (Ft.) | jht (Lbs.) | )EL                   | RE |
|           |  | PSI (BAR)<br>100 (6.89)         |            |            |            |              |                       |    |    |            |         | Electric | UL Li          | Brass                | Chrome    | Com | EK-C      | Effec       | Weight                | MODEL      | FIGURE                |    |
|           |  |                                 | •          |            |            |              | •                     | •  | •  | •          |         |          |                | •                    | S         | 0   |           |             | 145                   | 13.2       | HF-350                | 1  |
|           |  |                                 | •          |            |            |              | •                     | •  | •  | •          |         |          |                |                      |           |     |           | S           | 145                   | 4.2        | HF-350-A              | 1  |
|           |  |                                 |            | •          |            |              | •                     | •  | •  |            |         |          |                | •                    | S         | 0   |           |             | 162                   | 13.2       | HF-500                | 1  |
| 2″        |  |                                 |            | •          |            |              | •                     | •  | •  |            |         |          |                |                      |           |     |           | S           | 162                   | 4.2        | HF-500-A              | 1  |
| 2.5       | •  |                                 |            |            |            |              |                       |    |    |            |         | S        |                |                      |           |     |           | S           | 250                   | 20.7       | SM-1000-HF            | 2  |
| .,        | •  |                                 |            |            |            |              | _                     |    |    | _          |         | S        | •              |                      |           |     |           | S           | 250                   | 20.7       | SM-1000E-HF           | 3  |
|           | Selectable: 500 / 750 / 1000 •             |                                 |            |            |            |              |                       |    |    |            |         |          | S              |                      |           |     | 212       | 22          | CSW-LBF               | 4          |                       |    |
|           |  |                                 |            |            | •          |              | _                     |    |    | _          |         | S        |                | $\vdash$             | S         |     |           |             |                       | 22         | HF13-750<br>HF13-1000 | 5  |
|           |  | •                               |            |            |            | •            | _                     | •  |    | _          |         | S        |                | $\vdash$             | S         |     |           | S           | 295                   | 21.6       | SM-2000-HF            | 2  |
| .5.       |  |                                 |            |            |            |              | <del></del>           | ÷  |    | _          |         |          | •              | $\vdash$             |           |     |           | 5           | 295                   | 21.6       | SM-2000-HF            | 3  |
| KEY       |  |                                 |            |            |            |              |                       |    |    |            |         |          |                |                      |           |     |           |             |                       |            |                       |    |

<sup>\*</sup>Fog pattern is 80°

## **SELF-EDUCTING FOAM CONFIGURATIONS**



Figures depict general product types only and are not intended to be inclusive of all product features.

# The state of the s

#### SELF-EDUCTING NOZZLE ACCESSORIES



#### **QUICK-CONNECT COUPLING**

- · The brass Quick-Connect Coupling is a convenient way of attaching/detaching pick-up hose
- Specify brass or chrome finish
- Length: 3.4"
- · Weight: 1.2 lbs.

#### **SHUT-OFF VALVE**

- · Quarter turn ball valve for positive shut-off of foam supply
- · Attaches to foam inlet of nozzle
- · Specify chrome or brass finish



#### **METERING VALVE**

- · The quarter turn ball valve for instant proportioning change
- Available in 1% / 3% or 3% / 6% configurations
- Attached to foam inlet of nozzle
- · Specify chrome or brass finish
- · Length: 3"
- · Weight: 1.3 lbs.



#### **DRUM PICK-UP KIT**


- Allows foam inlet of nozzle to be pre-connected to a 55 gallon drum of concentrate
- Kit 1 includes PVC pick-up tube with shut-off valve, brass vacuum breaker, and clear reinforced vinyl pick-up hose (8 feet)
- Kit 3 or Kit 4 includes PVC pick-up tube with shut-off valve only. Replaces non-valve pick-up tube that comes with nozzle.

| COMPATIBLE ACCESSORIES                    |             |             |       |       |  |  |  |  |  |
|---|-------------|-------------|-------|-------|--|--|--|--|--|
|   | FOAM NOZZLE |             |       |       |  |  |  |  |  |
| ITEM                                      | X-Str       | Hydro-Foam® |       |       |  |  |  |  |  |
|   | SM-1000 HF  | SM-2000 HF  | 350/A | 500/A |  |  |  |  |  |
| Quick-connect                             |             |             | •     | •     |  |  |  |  |  |
| Shut-off Value with Quick-connect         |             |             | •     | •     |  |  |  |  |  |
| 1% / 3% Metering Valve with Quick-connect |             |             | •     | •     |  |  |  |  |  |
| 3% / 6% Metering Valve with Quick-connect |             |             | •     |       |  |  |  |  |  |
| Shut-off Valve                            |             |             | •     | •     |  |  |  |  |  |
| 1% / 3% Metering Valve                    |             |             | •     | •     |  |  |  |  |  |
| 3% / 6% Metering Valve                    |             |             | •     |       |  |  |  |  |  |
| Drum Pick-up Kit 1                        |             |             | •     | •     |  |  |  |  |  |
| Drum Pick-up Kit 3                        | •           |             |       |       |  |  |  |  |  |
| Drum Pick-up Kit 4                        |             | •           |       |       |  |  |  |  |  |

Hose Clamp

**SELF-EDUCTING NOZZLE ACCESSORIES** 

# OPTIONAL HARDWARE FOR FOAM INLET LINE

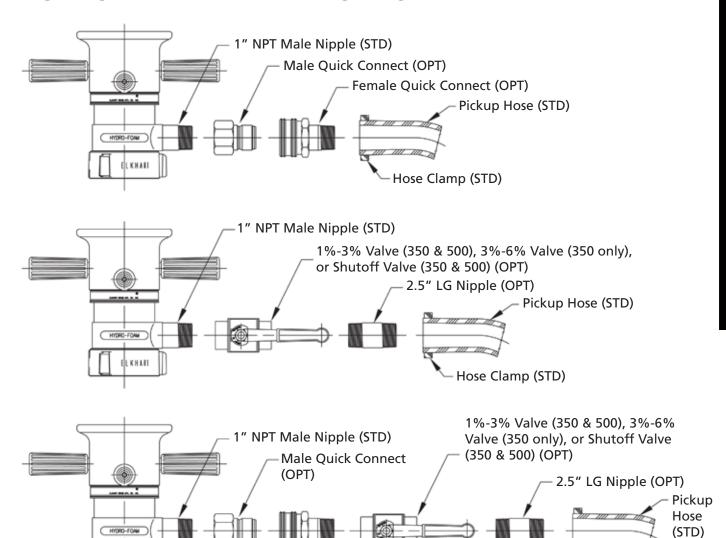

**NOTE:** These illustrations show typical combinations of valves and fittings. Other combinations can be provided to satisfy customer needs.

ELKHARI

Female Quick Connect (OPT)